




Hot Water 210 Compact

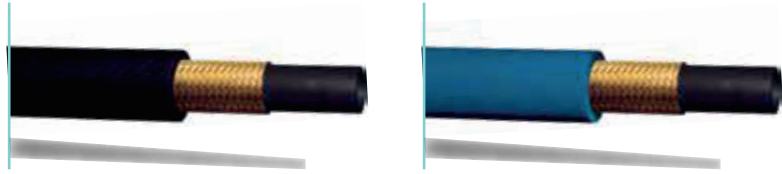

Application

Extremely flexible, high pressure, compact hose for cleaners. Suitable for passage of water, water-soap, emulsion.

Safety factor 1:4 (according to IEC 335-2)

	HOSE I.D.				HOSE O.D.		WORKING PRESSURE		BURST PRESSURE		MINIMUM BEND RADIUS		WEIGHT	
	DN	size	mm	inch	mm	inch	bar	psi	bar	psi	mm	inch	Kg/m	lbs/ft
210K-06-04	06	-4	6,4	1/4"	12,1	0.48	210	3100	840	12400	45	1.77	0,18	0.12
210K-08-05	08	-5	7,9	5/16"	14,0	0.55	210	3100	840	12400	55	2.17	0,23	0.15
210K-10-06	10	-6	9,5	3/8"	15,8	0.62	210	3100	840	12400	60	2.36	0,27	0.18
210K-12-08	12	-8	12,7	1/2"	19,4	0.76	180	2600	720	10400	70	2.76	0,36	0.24
210K-16-10	16	-10	15,9	5/8"	22,6	0.89	130	1900	520	7600	90	3.54	0,41	0.28

Construction:
Tube: Black synthetic rubber
Reinforcement: One high tensile steel braid
Cover: Black or blue, synthetic rubber resistant to abrasion and weather condition

Temperature:
 -40°C to 150°C
 -40°F to 302°F

DIESE RUBBER HOSES S.p.A.

Via Provinciale, 8 – SP 155 - 24040 - FILAGO (Bergamo) ITALY
 Phone: +39 (035) 49.42.300
 e-mail: diesse@diesserubber.com
www.diesserubber.com