




Hot Water 315

Thin cover

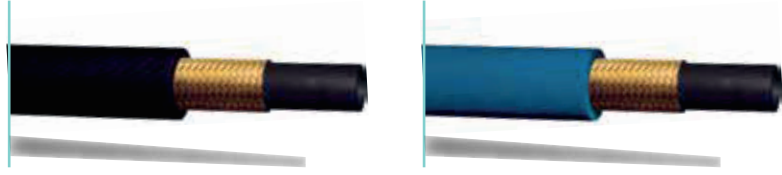

Application

One Braid, very good performance hose for cleaners. Suitable for passage of water, water-soap, emulsion. Safety factor 1:4 (according to IEC 335-2)

	HOSE I.D.				HOSE O.D.		WORKING PRESSURE		BURST PRESSURE		MINIMUM BEND RADIUS		WEIGHT	
	DN	size	mm	inch	mm	inch	bar	psi	bar	psi	mm	inch	Kg/m	lbs/ft
315T-06-04	06	-4	6,4	1/4"	13,2	0.52	315	4600	1260	18400	100	3.94	0,25	0.17
315T-08-05	08	-5	7,9	5/16"	14,6	0.57	315	4600	1260	18400	110	4.33	0,27	0.18
315T-10-06	10	-6	9,5	3/8"	16,6	0.65	315	4600	1260	18400	120	4.72	0,33	0.22

Construction:
Tube: Black synthetic rubber
Reinforcement: One high tensile steel braid
Cover: Black or blue, synthetic rubber resistant to abrasion and weather condition

Temperature:
 -40°C to 150°C
 -40°F to 302°F

DIESE RUBBER HOSES S.p.A.

Via Provinciale, 8 – SP 155 - 24040 - FILAGO (Bergamo) ITALY
 Phone: +39 (035) 49.42.300
 e-mail: diesse@diesserubber.com
www.diesserubber.com