




Iceflex 17

LOW TEMPERATURE EXCEEDS SAE 100 R17

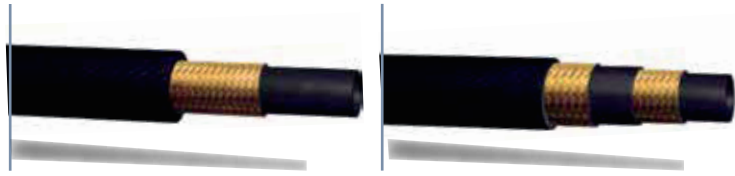

Application

Low temperature compact hose for medium pressure application with extreme flexibility. Recommend for using in frigid environments on construction equipment, machine tools and agriculture application where a tighter bend radius is needed. Meet and exceed SAE 100R17 performance. Suitable for passage of mineral and vegetable oils, water-based solutions, water air and inert gases.

	HOSE I.D.				HOSE O.D.		WORKING PRESSURE		BURST PRESSURE		MINIMUM BEND RADIUS		WEIGHT	
	DN	size	mm	inch	mm	inch	bar	psi	bar	psi	mm	inch	Kg/m	lbs/ft
IC17-06-04	06	-4	6,4	1/4"	12,3	0,48	210	3000	840	12000	50	197	0,18	0.12
IC17-08-05	08	-5	7,9	5/16"	14,0	0,55	210	3000	840	12000	55	217	0,21	0.14
IC17-10-06	10	-6	9,5	3/8"	15,9	0,63	210	3000	840	12000	65	256	0,27	0.18
IC17-12-08	12	-8	12,7	1/2"	19,1	0,75	210	3000	840	12000	90	354	0,38	0.26
IC17-16-10	16	-10	15,9	5/8"	23,9	0,94	210	3000	840	12000	100	394	0,64	0.43
IC17-19-12	19	-12	19,0	3/4"	28,0	1,10	210	3000	840	12000	120	472	0,80	0.54
IC17-25-16	25	-16	25,4	1"	35,3	1,39	210	3000	840	12000	150	591	1,15	0.77

Construction:

Tube: Black synthetic rubber resistant to oils
Reinforcement: One high tensile steel braid up to -8, two braids from -10 to -16
Cover: Black, synthetic rubber resistant to oils, abrasion and weather condition

Temperature:

-57°C to 100°C (125°C discontinuous)
 -70°F to 212°F (257°F discontinuous)

Version available:

MSHA HARC COVER

DIESE RUBBER HOSES S.p.A.

Via Provinciale, 8 – SP 155 - 24040 - FILAGO (Bergamo) ITALY
 Phone: +39 (035) 49.42.300
 e-mail: diesse@diesserubber.com
 www.diesserubber.com