




# Skyscraper

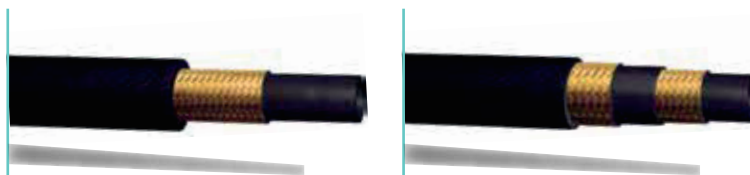

## Application

High pressure hose for elevators. The hose is in compliance with the standard EN 81-20 and guarantee a 9:1 safety factor.

	HOSE I.D.				HOSE O.D.		WORKING PRESSURE		BURST PRESSURE		MINIMUM BEND RADIUS		WEIGHT	
	DN	size	mm	inch	mm	inch	bar	psi	bar	psi	mm	inch	Kg/m	lbs/ft
SKS-19-12	19	-12	19,0	3/4"	26,3	1.03	50	725	450	2900	100	3.93	0,532	0.35
SKS-25-16	25	-16	25,4	1"	37,8	1.48	50	725	450	2900	180	7.08	0,75	0.50
SKS-31-20	31	-20	31,8	1.1/4"	42,2	1.66	50	725	450	2900	210	8.26	1,12	.075
SKS-38-24	38	-24	38,1	1.1/2"	50,4	1.98	50	725	450	2900	300	11.81	1,9	1.28
SKS-51-32	51	-32	50.8	2"	64	2.51	45	650	405	2600	500	19.68	2,86	1.92

**Construction:**

**Tube:** Black synthetic rubber resistant to oils

**Reinforcement:** One high tensile steel

braid up to -20 and two high tensile steel

braids for -24 and -32

**Cover:** Synthetic rubber resistant to oils, abrasion and weather condition

**Temperature:**

-40°C to 100°C

-40°F to 212°F

## DIESE RUBBER HOSES S.p.A.

Via Provinciale, 8 – SP 155 - 24040 - FILAGO (Bergamo) ITALY  
Phone: +39 (035) 49.42.300  
e-mail: [diesse@diesserubber.com](mailto:diesse@diesserubber.com)  
[www.diesserubber.com](http://www.diesserubber.com)